

HIGH TEMP
WASHI TAPE

PRODUCT
DATA SHEET

AS888
MASKING TAPE - WASHI

DESCRIPTION

Everyday painter's tape for automotive, marine, residential and commercial use. The smooth green rice paper backing is easy to curve and designed to provide clean, crisp edges and no paint bleed. Suitable for a wide range of paint pigments, it is waterproof and can be removed cleanly without leaving residue for up to 30 days.

ADHESION LEVEL	MEDIUM / HIGH
SURFACE TYPE	SMOOTH AND SEMI-SMOOTH SURFACES



FEATURES



CLEAN FINISH LINE

Provides painters with clean finish lines & very good conformability & resistance to paint bleed.



INTERIOR & EXTERIOR USE

Suitable for both interior and exterior use.



CLEAN REMOVAL

Clean removal for up to 30 days and simple to remove.



MULTI SURFACE

Suitable for most surface types without any adhesive leaching or shadowing effects. Surface types: wood, metal, plastic, glass, laminates & rubber.



GOOD TEMPERATURE RESISTANCE

Very good temperature resistance - up to +120°C for short period. (30 minutes)

TYPICAL APPLICATIONS

- Used for painting walls, ceilings, floors, furniture, cornice, skirting and other delicate areas.
- Used in automotive, marine and general trade applications.
- Suitable for use on smooth and semi-smooth surfaces.

ADVANTAGES

QUICK & EASY TO USE

Hand tearable for ease of use.
Easy off the roll.


SLIT TO SIZE IN NZ

Standard roll widths are 18mm, 24mm, 36mm & 48mm.
Other roll widths can be slit to required sizes in New Zealand.

FREE TECHNICAL ADVICE

Free technical assistance, samples and advice available
throughout NZ from the Acme sales team.

TAPE STRUCTURE

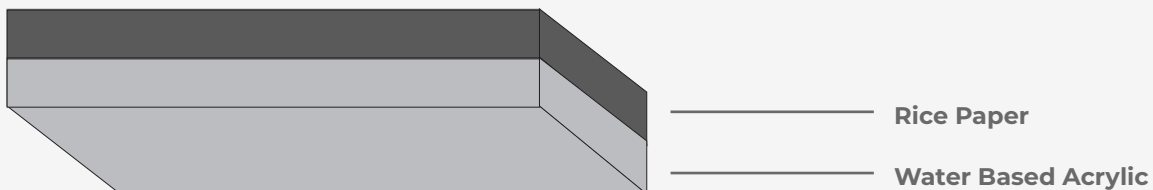

PRODUCT

High Temp Washi Tape

Available thickness: 110 μ m

Available Length: 50 m

IMPORTANT

Use only on tested & approved surfaces to ensure tape is selected correctly for the application & conditions. Ensure that all surface manufacturer recommendations are followed.

All surfaces must be correctly sealed and/or primed & only apply tape to clean, dry, non-flaky surfaces. Also test the tape in an inconspicuous place prior to use, especially on delicate or older worn surfaces.

Liability limited to tape replacement.

TECHNICAL INFORMATION

Backing	Rice Paper
Adhesive	Water Based Acrylic
Colour	Green
Tape thickness	110 µm +/- 10%
Elongation at break	5.5% - 8.5%
Adhesion to steel	3.0-4.8 N/25mm
Tensile Strength	40N-50N/cm
Shelf life	12 months from manufacture date (correct storage).
Temperature Range	120°C for 30 minutes
Core Size	76mm
Roll Length	50m
Standard Roll Width	18, 24, 36 & 48mm

Slit to various width sizes as required.

SURFACE SUBSTRATE CONDITION & PREPARATION

The surface on which the tape is to be used must be clean, dry and free from grease and dust.

Remember that the pressure sensitive adhesive must be applied with the maximum possible pressure in order to achieve maximum adhesion levels.

The recommended application temperature is between 12°C and 25°C.

PRODUCT USE

The information in this guide is based upon our knowledge & practical experience. This data is intended only as a source of information given without guarantee & does not constitute a warranty.

Due to the wide variety of possible uses & applications, customers should independently determine the suitability of these products for their specific purpose, prior to use. Trial samples are provided free of charge & without obligation.

For detailed surface preparation & application information, please refer to our detailed Surface Condition & Preparation Guide.

NOTE: We recommend tape product testing to assess the suitability of the selected product to the end application & conditions. For surface preparation and guidelines, please refer to our website www.tapespec.co.nz Advanced Tape Application Guide.